


Plastik Enjeksiyon
SBI / Silindir Başlı İtici

Malzeme : Özel alaşımlı çelik 1.2516
Sertlik : 60+2 HRC / Kafa 45+5 HRC
Yüzey : sertleştirilmiş, taşlanmış.

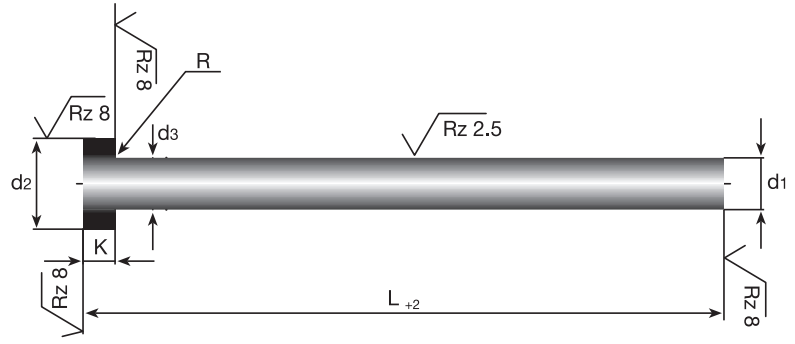

d1 g6	d2 - 0,2	K - 0,05	R +0,2	d3	L+2										
					100	125	160	200	250	315	400	500	630	800	1000
1,0	2,5	1,2	0,2	d1 +0,03	✓	✓	✓	✓	✓						
1,5	3	1,5			✓	✓	✓	✓	✓						
2,0	4	2			✓	✓	✓	✓	✓	✓	✓				
2,5	5		✓		✓	✓	✓	✓	✓	✓	✓				
3,0	6	3	0,3		✓	✓	✓	✓	✓	✓	✓	✓	✓		
3,5	7				✓	✓	✓	✓	✓	✓	✓	✓	✓		
4,0	8				✓	✓	✓	✓	✓	✓	✓	✓	✓		
4,5					✓	✓	✓	✓	✓	✓	✓	✓	✓		
5,0	10				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
5,5		✓	✓		✓	✓	✓	✓	✓	✓	✓				
6,0	12	5	0,5		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
6,5					✓	✓	✓	✓	✓	✓	✓	✓	✓		
7,0					✓	✓	✓	✓	✓	✓	✓	✓	✓		
7,5					✓	✓	✓	✓	✓	✓	✓	✓	✓		
8,0					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
8,5	14	7	0,8	d1 +0,04	✓	✓	✓	✓	✓	✓	✓	✓	✓		
9,0					✓	✓	✓	✓	✓	✓	✓	✓			
10,0					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
10,5	16				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
11,0					✓	✓	✓	✓	✓	✓	✓	✓			
12,0	18	7	0,8		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
13,0	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓		
14,0	22				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
16,0					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
18,0	24				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
20,0	26	8	1,0		d1 +0,1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
25,0	32	10				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Kademeli ve özel ölçü ürünler
süratle teslim edilmektedir.