

## MSK - TEMAK

### Elle Sıkma Mandren (Supra)



Sıkma Kapasitesi (mm)	Bağlantı Tipi
0-10	B12
0-10	3/8-24 UNF
0-10	1/2-20 UNF
1-13	B16
1-13	3/8-24 UNF
1-13	1/2-20 UNF
1-16	B16
1-16	B18
1-16	1/2-20 UNF
1-16	5/8-16 UNF
5-20	B22

### Anahtarlı Mandren



Sıkma Kapasitesi (mm)	Bağlantı Tipi
1-16	B16
1-16	B18
1-20	B22
1-26	B24

### Mandren Koniği





MK DIN 228 - B	KONİK	MK DIN 228 - B	KONİK
MK1	B10	MK3	B16
MK1	B12	MK3	B18
MK2	B10	MK3	B22
MK2	B12	MK3	B24
MK2	B16	MK4	B16
MK2	B18	MK4	B18
MK3	B12	MK4	B22
		MK4	B24

### Mors Kovanı



Dış Konik	İç Konik
MK2	MK1
MK3	MK1
MK3	MK2
MK4	MK1
MK4	MK2
MK4	MK3
MK5	MK1
MK5	MK2
MK5	MK3
MK5	MK4
MK6	MK5

## Hassas Cnc Normal Döner Punto

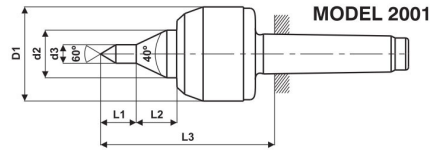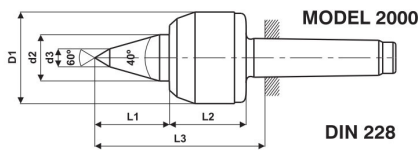

MODEL	Mors Koniği / Morse conic	2000			2001		
		MK	3	4	5	3	4
Ölçüler mm Dimensions mm	D1	58	68	78	58	68	78
	d2	24.5	34.5	43.5	24.5	34.5	43.5
	d3	9	14	14	9	14	14
	L1	43	57	68	15	25	25
	L2	51	56	69	28	32	44
L3	102	123	148	107	121	148	
Uç Salgısı / Center Runout	Max	0.005	0.005	0.01	0.005	0.005	0.01
Ağırlık / Weight	kg.	2	2.85	4.5	2	2.8	4.45
Sipariş Kodu / Order Code		C30	C40	C50	C60	C70	C80

