



Boynuz Pimi Yatağı

Malzeme : Asil Çelik 1.7131 (16MnCr5)
Sertlik : 62± 2 HRC
Isıl işlem : Sementasyon
DIN 16716 - C




d1	S	d2	d3	d5	L1	L3	T1	T2
32	36	12	16	M6	7	10	10	12
36	36	14	18	M8	7	12	10	16
40	46	16	20	M8	8.5	13.5	10	16
40	46	18	22	M8	8.5	13.5	10	16
45	46	20	25	M8	8.5	15	10	16
50	56	25	29	M8	10	16	12	16
63	66	30	34	M10	12	21	15	20


Lineer Burç




Malzeme :
Asil Çelik 1.3505 (100 Cr 6) + Bronze
Misket (Ball) 1.3505 (100 Cr 6)
Sertlik :
62 ± 2 HRC
Isıl işlem :
Sertleştirme

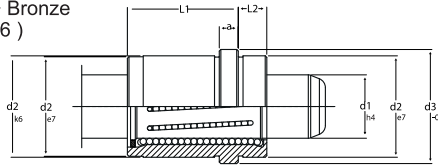

d1	d2	d3	L1	a	L2
12	22	26	20	6	8
18	30	35	24	6	9
20	32	36	26	6	9
* 20	32	36	35	6	9
30	46	52	34	6	12




Malzeme :
Asil Çelik 1.3505 (100 Cr 6) + Bronze
Misket (Ball) 1.3505 (100 Cr 6)
Sertlik :
62 ± 2 HRC
Isıl işlem :
Sertleştirme

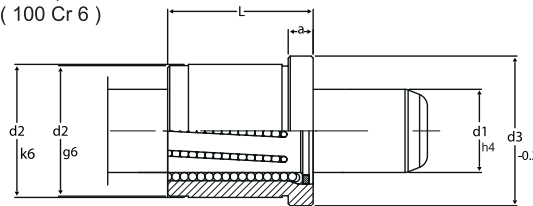

d1	d2	d3	L	a
* 20	32	36	35	6
* 25	40	45	35	6
* 40	60	64	45	8
* 40	60	64	63	8



Malzeme :
Asil Çelik 1.3505 (100 Cr 6) + Bronze
Misket (Ball) 1.3505 (100 Cr 6)
Sertlik :
62 ± 2 HRC
Isıl işlem :
Sertleştirme

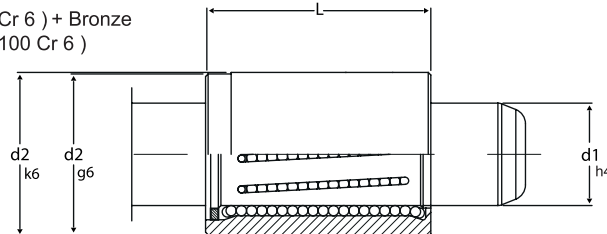

d1	d2	L
* 20	32	35
* 20	32	45
* 25	40	45
* 25	40	55

*Siparişe göre özel olarak üretilir.