



Kalıp Taşıma Mapası

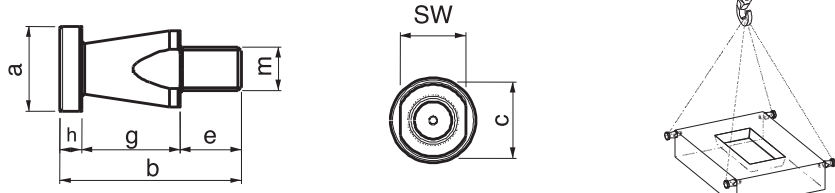



Referans Nr.	m	a	b	c	sw	e	g	h	Bir mapanın taşıma kuvveti Lifting Force of one Ringbolt Kgf	(g)
2730-016	M16	39	85	35	30	30	45	10	660	400
2730-020	M20	39	85	35	30	30	45	10	1000	420

Kalıp Taşıma Mapası

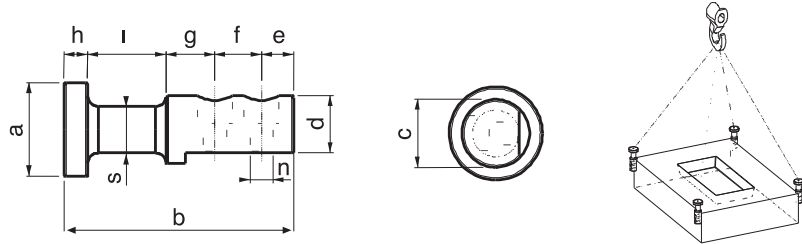


Referans Nr.	a	b	c	d	e	f	g	h	i	n	s	Bir mapanın taşıma kuvveti Lifting Force of one Ringbolt Kgf	(g)
2750-044	44	108	32	27	15	22	23	11	37	11	22	400	600

CNC Yumuşak Ayak



Referans Nr.	inch	hatve	L	b	h	n	c	k	j	e	m	s	kg
2770-0612	6"inc	1.5x60	72	32	32	12	5	15	20	11	22	10	1.2
2770-0814	8"inc	1.5x60	98	37	37	14	5	24	25	13	22	14	2.5
2770-1016	10"inc	1.5x60	110	42	42	16	5	30	30	13	29	14	3.7
2770-1218	12"inc	1.5x60	130	50	52	18	5	39	30	15	32	17	7.0
2770-1221	12"inc	1.5x60	130	50	52	21	5	39	30	17	32	19	6.5
2775-0612	6"inc	1.5x60	72	30	37	12	5	15	20	11	17	10	1.7
2775-0814	8"inc	1.5x60	95	35	67	14	5	24	25	13	19	14	3.6
2775-1016	10"inc	1.5x60	110	40	77	16	5	30	30	13	19	14	6.6
2775-1218	12"inc	1.5x60	130	50	77	18	5	39	30	15	23	17	9.3
2775-1221	12"inc	1.5x60	130	50	77	21	5	39	30	17	23	19	9.2

Yumuşak Ayak "T" Pabucu

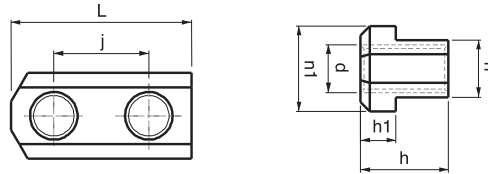

Referans Nr.	inch	L	h	n	n1	h1	d	j	(g)
2790-0610	6"inc	38	18.5	12	18	7.5	M10	20	60
2790-0812	8"inc	45	21.5	14	21	8.5	M12	25	80
2790-1012	10"inc	52	21.5	16	22	8.5	M12	30	100
2790-1214	12"inc	55	33.5	18	26.5	13.5	M14	30	225
2790-1216	12"inc	55	27	18	29	13.5	M16	30	220